

CORRUGATE


Roofing
Industries

roof.co.nz




CORRUGATE

CORRUGATE



WIDE CORRUGATE



All measurements are in millimetres




Description

Corrugate remains an ageless icon, and as a cost competitive and trend setting roofing and cladding material continues to gain in popularity. Corrugate offers a stylish alternative to today's building designers and home owners alike, allowing creative flair and individuality during the design process.

Product flexibility coupled with a small amount of imagination will ensure a distinct point of difference to other homes and buildings in the vicinity.

Corrugate is available in both standard and wide cover widths. (Wide cover widths subject to minimum quantity).

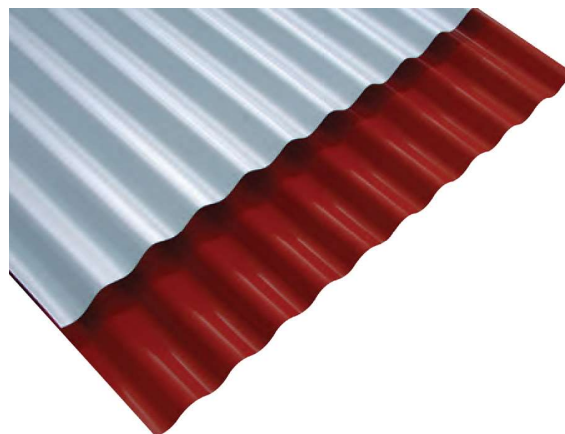

This literature should be read in conjunction with our technical information



Roofing Industries Technical Helpline 0800 844 822 WWW.ROOF.CO.NZ

CORRUGATE

Applications

- Residential roofing & cladding
- Rural and lifestyle roofing & cladding
- Commercial roofing & cladding
- Drape/spring curving
- Bull nose
- Horizontal cladding
- Ceilings and linings
- Acoustic ceiling linings
- Fencing

Roof Pitch

In accordance with E2/AS1 of the NZ Building Code, the minimum pitch for Corrugate is 8°. For end lapped sheets or a roof length greater than 18m, contact Roofing Industries for specific advice.

Materials

- Zincalume® Steel: 0.40mm or 0.55mm BMT, AZ150 (150gm/m²) G550 Mpa Yield Stress

- Galvanised Steel: 0.40mm or 0.55mm BMT, Z450 (450gm/m²) G550 Mpa Yield Stress
- Pre-painted
COLORCOTE® or **COLORSTEEL®** over Zincalume®
0.40mm or 0.55mm BMT, AZ150 (150gm/m²), G550 Mpa Yield Stress
- Prepainted
COLORCOTE® or **COLORSTEEL®** over Galvanised Steel: 0.40mm or 0.55mm BMT ZM275 (275gm/m²) G550 Mpa Yield Stress
- 0.55mm BMT may be supplied as G300 Mpa Yield Stress

For information on Aluminium, Stainless Steel and Copper Corrugate, contact Roofing Industries.

Roof Application

Timber Purlins 12 x 50 Timbertite® class 4 screws with neos or 60mm Weatherseal® nails*

Steel Purlins 12 x 45 Steeltite® class 4 screws with neos*

- Fix side laps and every second crest to: Ridge, Hip, Valley, Gutter and Periphery areas

- For the remainder of the roof: Fix Side laps, Miss 2, Hit 1, miss 2 etc

* For sheet lengths 8-18 metres the lower 50% of the roof should be fixed using oversize holes at fastening points and a 30mm EPDM and matching metal profile washer. For sheets in excess of 18 metres refer to our website www.roof.co.nz.

Walling Application

Fix in the pan adjacent to every side-lap over rib and every second pan using Class 4 Timbertites® or Steeltites® and neos as appropriate, ensuring that when the fastener is into timber it is of sufficient length to penetrate the framing by 25mm.

Note: the above recommendations are suitable for steel based materials, for other materials refer to our website www.roof.co.nz.

Curving

Steel substrate Corrugate can be spring curved to the following radius.

0.40mm BMT–12 metres

0.55mm BMT–10 metres

Corrugate can be bullnosed or curved to a minimum radius of 300mm.

Ordering

Roofing Industries staff can provide technical assistance to ensure accurate ordering of roofing and accessories thereby avoiding costly errors. Corrugate is manufactured and delivered cut to length.

Handling and storage

- On delivery, visually inspect sheets for damage.
- Store Corrugate and accessories on evenly spaced and supportive dunnage, clear of the ground and under cover. If packs become wet and the product not used immediately, separate the sheets to allow air circulation and drying.
- Do not drag sheets across each other.
- If protected with strippable plastic film, keep under cover and remove as the product is being installed.

Installation

Prior to commencing your project, please refer to Roofing Industries Handling Storage and Installation Guide, E2/AS1 and the NZ Metal Roof and Wall Cladding Code of Practice. Failure to install the product to industry requirements will void the warranty.

Maintenance

Regular maintenance will extend the life of the roof and accessories. It is strongly advised that areas not receiving regular rain washing should be washed with freshwater on a regular basis. On purchasing your roof it is imperative to request a copy of the maintenance guide(s) and familiarise yourself with industry requirements. Failure to do so can void the warranty.

Warranties

Warranties meet the statutory requirements of the NZ Building Code, are available on request and reflect our New Zealand owned and operated company, test facilities and local climatic conditions. Sample warranties are available at website www.roof.co.nz.

SPECIFICATIONS

Sheet width: 845mm & 1100mm

Sheet length: Any length (Subject to transportation)

Sheet coverage: 762mm & 995mm

Minimum Pitch: 8°

SPAN TABLES (Steel Substrate Material)

Type of Span	Maximum Span (Metres)			Maximum Span (Metres)		
	0.40mm BMT			0.55mm BMT		
	Wind Zone			Wind Zone		
	Low & Medium	High	Very High	Low & Medium	High	Very High
Intermediate	1.200	1.100	0.900	1.600	1.450	1.200
End	0.700	0.700	0.650	0.950	0.950	0.900

Durability

Selection of the correct grade of material and appropriate surface coating is imperative to ensure Corrugate will perform satisfactorily in the environment it is to be installed, and meets the requirements of The NZ Building Code. Environmental Categories and Surface Coating literature is available on request.

Accessories

A full range of matching accessories is available, including Ridging, Ridgecaps, Flashings, Underlays, Insulation, Fasteners, Rotary Roof Ventilators and Rainwater systems.

Translucent and Transparent roofing

Corrugate is also available as glass reinforced, polycarbonate and PVC roofing and cladding.

Fixings and Fasteners

Fixings and fasteners are to be of an approved type, compatible with all materials, the environment and meeting the requirements of the NZ Building Code. Installation is to be in accordance with E2/AS1 and the NZ Metal Roof and Wall Cladding Code of Practice. Further information is available via the www.roof.co.nz website.

Your distributor

AUCKLAND (Head office)

Roofing Industries Ltd
5 John Glenn Avenue,
North Harbour
PO Box 302-385
North Harbour 0751
Ph: (09) 414 4585
Fax: (09) 414 4586
office@roof.co.nz

WHANGAREI

Roofing Industries (Northland) Ltd
38 Winger Crescent, Kamo,
Whangarei
PO Box 883
Whangarei 0112
Ph: (09) 437 2040
Fax: (09) 437 5010
northland@roof.co.nz

WAIKATO

Roofing Industries (Waikato) Ltd
Unit 4/550 Te Rapa Rd
Te Rapa, Hamilton
PO Box 20281 Te Rapa,
Hamilton 3241
Ph: (07) 849 5115
Fax: (07) 849 2115
waikato@roof.co.nz

TAUPO

Roofing Industries (Taupo) Ltd
1158 Rakaunui Rd
Taupo
PO Box 408
Taupo 3351
Ph: (07) 376 7971
Fax: (07) 376 7972
taupo@roof.co.nz

PALMERSTON NORTH

Roofing Industries (Central) Ltd
653 Tremaine Ave
Palmerston North
PO Box 4584
Palmerston North 4410
Ph: (06) 353 8480
Fax: (06) 353 8470
central@roof.co.nz

SOUTH ISLAND

Roofing Industries Ltd
220a Annex Road
PO Box 6248
Upper Riccarton
Christchurch 8442
Ph: (03) 339 2324
Fax: (03) 339 2325
south@roof.co.nz



It should be noted that this technical data sheet is based around the requirements of E2/AS1 of the NZBC. For buildings or uses that are outside the scope of, or **NOT** required to comply with E2/AS1 alternative technical data may apply. Please contact Roofing Industries Ltd.

This literature should be read in conjunction with our published technical information



Roofing Industries Technical Helpline 0800 844 822 **WWW.ROOF.CO.NZ**

CORRUGATE

Roofing
Industries

roof.co.nz

PROFILE TECHNICAL SUMMARY


Corrugate lap



(All dimensions are nominal and in mm.)


Corrugate 762 (Standard)

Dimensioned Drawing of Corrugate

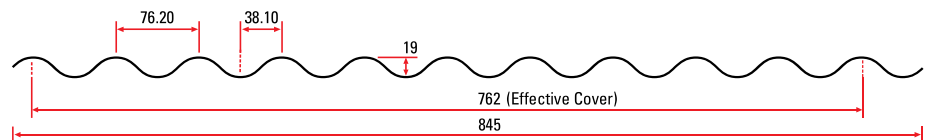

Corrugate 995

Dimensioned Drawing of Wide Corrugate



Minimum Pitch

The minimum roof pitch for Corrugate is 8 degrees (approx 1:7) and if end lapped 10 degrees (approx 1:6).


When a combination of sheets provide a run of in excess of 40 metres and up to 60 metres the roof pitch should be increased by 1 degree. Longer lengths require specific design.

When rainfall intensity exceeds 100mm/hour the minimum pitches need to be increased by a further 1 degree for every 10 metres of run over 40 metres

The building design pitch may need to be higher to take into account any cumulative deflections of the frame, purlin and roof sheeting or penetrations.

For curved roofing the roof cladding must **not** terminate at a pitch lower than permitted above.

Side laps of curved sheets must be sealed to any areas below the minimum pitches permitted above.

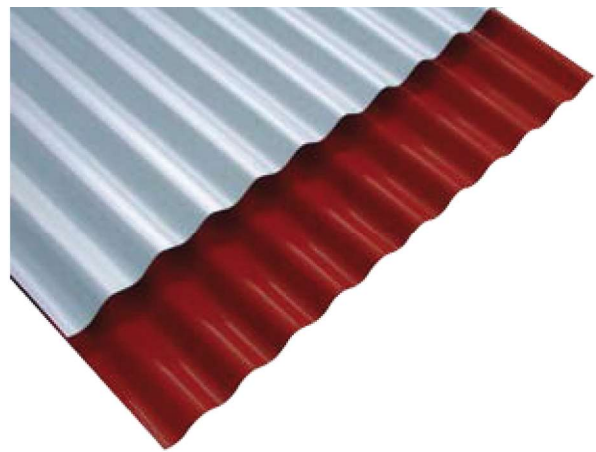

Branches: • Whangarei • Auckland • Pukekohe (Franklin Metal Folding & Roofing Ltd) • Hamilton • Taupo • Palmerston North
• Wellington • Christchurch

- Manufactured custom cut to length subject to transport and site limitations.
- Sheet lengths in excess of 28 metres require specialised transportation.
- Maximum recommended sheet lengths for **Aluminium** is 10-12 metres for dark coloured and 12-15 metres for plain and light coloured. Refer to Roof Expansions Provisions of this summary.
- As sheet lengths increase higher transportation costs may be applicable.
- Sheet lengths for pre-curved material are subject to handling and transport limitations.

Information Table

Substrate Material	Steel		Aluminium	
Thickness	.40mm BMT	.55mm BMT	.70mm BMT	.90mm BMT
Aprox weight per lineal metre for substrate material (kg/lm)	3.2	4.27	1.84	2.37
Purlin Spacings -General	Refer to separate section.		Refer to separate section.	
Unsupported Overhang (mm) ¹	150	150	100	150
Drape Curved Roof -Minimum Radius (m)	12	10	12	10
Purlin Spacings for Curved Roofs -Intermediate (mm)	900	1200	800	1200
-End (mm)	600	800	550	800
Precurved Roof -Minimum Radius (mm)	N/R ²	300	300	300
-Recommended Minimum Radius (mm)	N/R ²	400	400	400

¹ Not suitable for roof access without additional support ² N/R - Not recommended

This technical data sheet is for steel and aluminium based substrates. Corrugate can also be manufactured in other metals such as copper or titanium zinc. Refer to Roofing Industries.

Specification

Refer to our Full Specification on Masterspec, our website, and our Selection Guide.

Building Design / Performance Criteria / Product Selection

During the design of buildings, it is necessary for the designer to take into account a number of issues to ensure that the most appropriate roofing and cladding product is chosen.

Whilst aesthetics and product availability do play a part, the chosen profile must meet certain performance criteria. These are centred around the profile's ability to shed water from the roof and the ability of the product to span purlin and girt spacings and meet design criteria. The minimum pitch for this profile is outlined elsewhere within this literature.

In terms of purlin spans and girt spacing it is necessary to follow due process.

If a building is being designed and constructed in full accordance with E2/AS1 and roofing and cladding products as covered by that document are chosen, then it is necessary for the design spans and fixing methodology to comply with those of E2/AS1. However E2/AS1 states that the use of the manufacturers information may provide a more optimum spacing of fixings, and this is recommended by Roofing Industries.

Further where a building is outside of the scope of E2/AS1 and the building or parts thereof are of specific design then it is necessary for the roofing and cladding to be suitable for the design and vice versa.

Loadings referred to in Roofing Industries graphs are the result of testing to a serviceability limit state which is more conservative than an ultimate limit state as quoted by some manufacturers.

Our Design Graphs are presented in a form to allow the designer to select suitable products and purlin spacings.

For most roof installations the purlin spacings will be limited by the trafficable limitations of the profile or the structural design. It is then necessary for the designer to calculate the design wind load for the roofing and cladding in accordance with generally acceptable practice, by reference to AS/NZS 1170.2:2011 and/or NZS 3604:2011.

For a fuller explanation of this refer to the NZ Metal Roof and Wall Cladding Code of Practice. This result should be referenced to the Wind Load Span Design Graphs.

The purlin spacings should be limited to the lower of the trafficable limitations and design wind load with the capacity of the structure being greater than the design load for the application. However for roofs that are not able to be walked on and for wall cladding applications, the trafficable limitations may be exceeded providing the design wind loading criteria is met. However this should be done with caution as it may require considerable extra secondary fasteners within the laps.

The designer should always take into account in areas of heavy roof traffic, snow loadings, or where the roofing supports such items as air conditioning units, purlin spacing should be reduced accordingly. Consideration also needs to be given to limitations of purlin spacings for any translucent sheeting.

Reference should be made to the notes in the graphs.

It is our recommendation that for commercial and industrial roofing applications that .55mm BMT steel or .90mm BMT Aluminium is used as it has more resilience to damage particularly by other trades.


Underlay as per the project specifications should be used.

With an aluminium substrate steel netting should not be used where it may be in contact (either directly or through underlay degradation) with the aluminium roofing or cladding. Alternative material such as polypropylene strapping should be used where support is required, or the cladding separated from the underlay by a high density polystyrene batten or Thermakraft Drainage Matt or similar, and the use of an aluminium gutter flashing. This is also applicable to coated metal and zinc roofing in severe marine applications. As corrugated has a minimum pitch of 8°, self supporting paper (without the use of netting or other support) can generally be used, and in any case self supporting paper is recommended even when support is required, in the above situations.


WIND LOAD SPAN DESIGN GRAPH

Roofing - Steel Based Material

kPa **.40 Steel G550 High Strength**

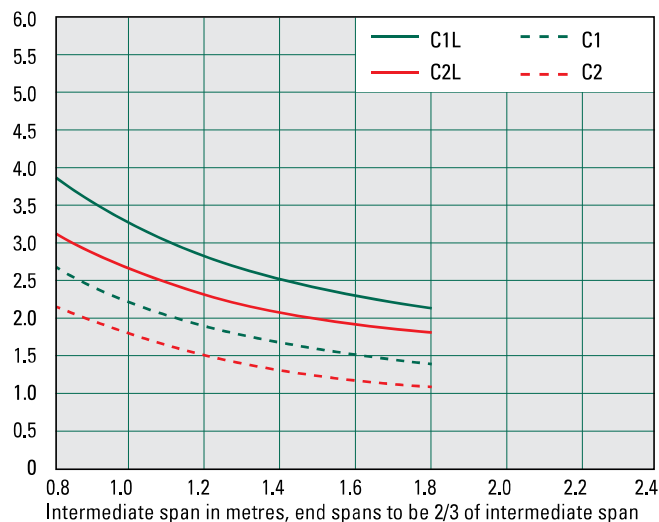

kPa **.55 Steel G550 High Strength.**

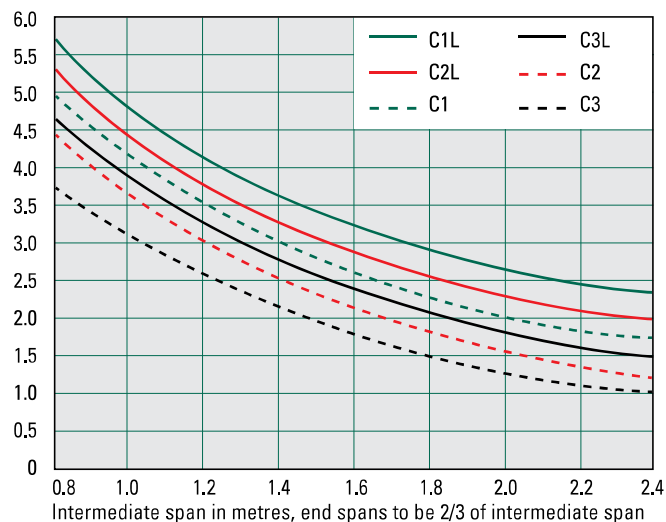

C1L, C2L, C1, C3L, C2 and C3 represent alternative primary fixing methods

Testing confirms that .70mm Aluminium has similar results to .40mm Steel and that .90mm Aluminium has similar results to .55mm Steel and is adjusted for practical application. Aluminium requires load spreading washers and EPDM washers at all times.

For compliance with NZ Metal Roof and Wall Cladding Code of Practice.

Primary Fixing Methods*

Roofing Application

- C1L** Fix side laps and every 2nd crest with approved screws and load spreading profiled metal washers and EPDM washers.
- C2L** Fix side laps and miss 1, hit 1, miss 2, hit 1, miss 1, hit 1, miss 2 etc with approved screws and load spreading profiled metal washers and EPDM washers. End purlins and periphery of roof to be fixed every 2nd crest.
- C1** Fix side laps and every 2nd crest with approved fasteners alone.
- C3L** Fix side laps and miss 2, hit 1, miss 3, hit 1, miss 2 etc with approved screws and load spreading profile metal washers and EPDM washers. End purlins and periphery of roof to be fixed every 2nd crest.
- C2** Fix side laps and miss 1, hit 1, miss 2, hit 1, miss 1, hit 1, miss 2 etc with approved fasteners alone. End purlins and periphery of roof to be fixed every 2nd crest.
- C3** Fix side laps and miss 2, hit 1, miss 3, hit 1, miss 2 etc with approved fasteners alone. End purlins and periphery of roof to be fixed every 2nd crest.

* Note - Compliance with E2/AS1 is dependent on purlin spacing and gauge of roofing. See section on Purlin/Girt Spacing Limitations and Recommendations.

Drape Curved Roofing

The first two purlins at each end of the sheet in drape curving situations should, in all cases, be fixed using profile metal washers and EPDM washers with the balance of the roof fixed as above.

Primary Fixing Methods**

Wall Cladding Application

Fix in the pan adjacent to every side lap over rib and every 2nd pan, and at all external and internal corners.
(No metal washer required)

Wall Cladding Wind Load Span

Pan fixed wall cladding can be assumed to have a wind load design at least equivalent to C1L from the above graphs.

** Note - Compliance with E2/AS1 is dependent on girt spacing and gauge of cladding. See section on Purlin/Girt Spacing Limitations and Recommendations.

To be read in conjunction with Roof Expansion Provisions

PURLIN/GIRT SPACING LIMITATIONS AND RECOMMENDATIONS

Dimensions in metres

Section 1. For compliance with E2/AS1		Fixing Patterns (Refer to section on Primary Fixing Methods)						Aluminium H36	
		Steel Based Material							
		.40mm BMT			.55mm BMT			.70mm BMT	.90mm BMT
End Span	Intermediate Span	Windzone			Windzone			Refer to manufacturers recommendation.	
		Low & Med	High & Very High	Extra High	Low & Med	High & Very High	Extra High		
0.4	0.6	C2	C2	C2	C3	C3	C3		
0.6	0.9	C2	C2	C1	C3	C3	C3		
0.8	1.2	C2	C1	C1	C3	C3	C3		
1.15	1.6	N/A	N/A	N/A	C3	C3	C2		
N/A - Not applicable									

Section 2.

Manufacturers recommendation in accordance with NZ Metal Roof and Wall Cladding Code of Practice (When compliance with E2/AS1 not required)

		Steel Based Material		Aluminium H36	
		.40mm BMT	.55mm BMT	.70mm BMT	.90mm BMT
Restricted Access Roof (Type 2B) (Where walking is permitted within 300mm of the purlin line or over 2 crests)	Intermediate	1.200	1.600	0.800	1.200
	End	0.800	1.100	0.550	0.800
Unrestricted Access Roof (Type 2A) (Where walking is permitted anywhere on the roof cladding)	Intermediate	N/R*	1.200	N/R*	0.900
	End	N/R*	0.800	N/R*	0.600
Non Accessible Roof and Wall Cladding (Type 3)	Intermediate	1.600	2.400	1.500	2.100
	End	1.100	1.600	1.000	1.400
Maximum Recommended Purlin Spacing for standard roof (See notes below)	Intermediate	0.900	1.500	0.800	1.200
	End	0.600	1.000	0.550	0.800
Wind Design Load using fixing method C2 (minimum) as an example at these purlin spacings from the Wind Load Span Design Graphs	Intermediate	1.9kPa	2.3kPa	1.9kPa	2.3kPa
	End	2.5kPa	3.6kPa	2.5kPa	3.6kPa

* Not recommended

Classification Types are from the NZ Metal Roof and Wall Cladding Code of Practice.

For other than compliance with E2/AS1 purlin spacing limitations to be read in conjunction with Wind Load Span Design Graphs.

In areas of heavy traffic purlin spacing should be reduced accordingly.

For curved roofing refer to Information Table.

When self supporting paper is preferred to be used (without any support) purlin spacings must be limited to a maximum of 1.200 mtr centres for vertically run underlay and 1.150 mtr centres for horizontally run underlay. This is particularly relevant with aluminium and /or severe marine environments for the reasons designated under Building Design/Performance/Product Selection part of this document.

Snow Loads

When the possibility of snow exists it is necessary to allow for the extra imposed snow loads by increasing the strength of the structure, and/or minimising the build up of snow, and this is generally achieved by increasing the roof pitch by allowing easier shedding of the snow or otherwise as the designer determines.

The objective is to simplify rather complex loading patterns while remaining adequately cautious. The design loads should take account of drifting snow due to wind, but wind loads are not required to be combined with snow loads.

As snow loads are uniformly distributed loads they are similar to wind loads.

Snow loadings are not required to be taken into account for the North Island of New Zealand north of a line drawn from Opotiki to Turangi and New Plymouth.

However for other areas snow loadings may need to be taken into account dependent on the area and altitude of the proposed project. A fuller reference including a map and chart is available from the NZ Metal Roofing Roof and Wall Cladding Code of Practice Section 3.5.

PRIMARY FIXING CHART

Roofing - Crest fixed (To be read in conjunction with Roof Expansion Provisions and Load Span Design Graphs)

	Wood Purlins	Steel Purlins or girts up to 1.5mm	Steel Purlins or girts 1.5-4.5mm	Steel Purlins or girts 4.5-12mm	Washers (When required)
Steel Based Material	12-11x50 Class 4 Type 17 Woodteks or Roofzips with neos or 60mm weatherseal nails	12-14x45 Class 4 Steelteks with neos or 12x50 Roofzips with neos	12-14x45 Class 4 Steelteks with neos	12-24x 50 Class 4 Series 500 Steelteks with neos	Corrugated load spreading profile Metal and 30mm EPDM
Aluminium Based Material	14-11x55 Alutite with bonded washer with Corrugate load spreading profile Ali washer & 30mm EPDM	Stainless steel grade 304, 14-14x70 Steelteks and bonded washers through a 10mm dia. clearance hole with Corrugate load spreading profile Ali washer & 30mm EPDM	Stainless steel grade 304, 14-14x70 Steelteks and bonded washer through a 10mm dia. clearance hole with Corrugate load spreading profile Ali washer & 30mm EPDM	Fabco stainless steel grade 304, 14-14x70 Type B screw and bonded washer through a 10mm dia clearance hole with Corrugate load spreading profile Ali washer and 30mm EPDM	Corrugate load spreading profile Ali and 30mm EPDM

Wall Cladding - Pan fixed

	Wood Purlins	Steel Purlins or girts up to 1.5mm	Steel Purlins or girts 1.5-4.5mm	Steel Purlins or girts 4.5-12mm	Washers (When required)
Steel Based Material Direct fixed	12-11x40 Class 4 Type 17 Woodteks with neos	12-14x20 Class 4 Steelteks with neos	12-14x20 Class 4 Steelteks with neos	12-24x32 Class 4 Steelteks Series 500 with neos	
Steel Based Material 20mm Cavity	12-11x50 Class 4 Type 17 Woodteks or Roofzips with neos	12-14x45 Class 4 Steelteks with neos or 12x50 Roofzips with neos	12-14x45 Class 4 Steelteks with neos	12-24x50 Class 4 Steelteks Series 500 with neos	
Aluminium Based Material Direct Fixed	12-11x35 Alutite with bonded washer	Stainless steel grade 304, 14-14x25 Steelteks and bonded washer through a 10mm diameter clearance hole with 19mm bonded Ali washer	Stainless steel grade 304, 14-14x25 Steelteks and bonded washer through a 10mm diameter clearance hole with 19mm bonded Ali washer	Fabco stainless steel grade 304, 14-14x20 Type B screw and bonded washer through a 10mm diameter clearance hole with 19mm bonded Ali washer	19mm bonded Ali washer
Aluminium Based Material 20mm Cavity	12-14x55 Alutite with bonded washer	Stainless steel grade 304, 14-14x70 Steelteks and bonded washer through a 10mm diameter clearance hole with 19mm bonded Ali washer	Stainless steel grade 304, 14-14x70 Steelteks and bonded washer through a 10mm diameter clearance hole with 19mm bonded Ali washer	Fabco stainless steel grade 304, 14-14x70 Type B screw and bonded washer through a 10mm diameter clearance hole with 19mm bonded Ali washer	19mm bonded Ali washer

Note: All primary fasteners to have a minimum embedment into structural timber of 30mm. Adjust fastener length for both timber and steel fixings when necessary for battens etc. When using load spreading profile washers for roofing fix ridding, roof flashings etc. using a 25mm Aluminium embossed washer and appropriate screw.

Secondary Fasteners (To be used in accordance with the NZ Metal Roof and Wall Cladding Code of Practice.)

These should be:

- Aluminium Blind Rivets AS5-3 x 4mm minimum (Residential)
- Aluminium Blind Rivets AS 6-3 x 4.8mm minimum (Commercial)
- Aluminium Bulb-tite Rivets
- 12-11x35 Alutites
- 12-11x25 Class 4 Type 17 Woodteks (Steel based material only)

ROOF EXPANSION PROVISIONS

Fix with recommended fasteners and systems from the Primary Fixing Chart and additionally allow for the following where applicable.

Steel Based Material				
E2/AS1 Compliance				
Sheet Lengths	Up to 8 metres	>8-12 metres	>12-18 metres	>18 metres
	No special provision	Lower 50 % of the roof should be fixed using oversize holes at fastening points with approved load spreading profile washer, and 30mm EPDM washers		Not Applicable
NZ Metal Roof and Wall Cladding Code of Practice Compliance				
Sheet Lengths	Up to 15 metres	>15-18 metres	>18-24 metres	>24-30 metres
Zincalume and light colours in Favourable Installations (Refer NZMRM C.O.P. Section 4.1.6)	No special provision	No special provision except screws are recommended	No special provision except screws are recommended	Solid fix using screws from the ridge down 24 metres and oversize holes should be used for the remainder of the sheet with approved load spreading profile washers, and 30mm EPDM washers
Dark Colours in Favourable Installations (Refer NZMRM C.O.P. Section 4.1.6)	No special provision	No special provision except screws are recommended	Solid fix using screws from the ridge down 18 metres and oversize holes should be used for the remainder of the sheet with approved load spreading profile washers, and 30mm EPDM washers	Not recommended*
Zincalume and light colours in Unfavourable Installations (Refer NZMRM C.O.P. Section 4.1.6)	No special provision	No special provision except screws are recommended	Solid fix using screws from the ridge down 18 metres and oversize holes should be used for the remainder of the sheet with approved load spreading profile washers, and 30mm EPDM washers. *Maximum recommended sheet length is 25 metres	
Dark Colours in Unfavourable Installations (Refer NZMRM C.O.P. Section 4.1.6)	No special provision	Solid fix using screws from the ridge down 15 metres and oversize holes should be used for the remainder of the sheet with approved load spreading profile washers, and 30mm EPDM washers.		* Not recommended over 25 metres

For sheet lengths in excess of the above a step joint or other special provision for expansion is required. Refer to Roofing Industries.

When using load spreading profile washers for roofing fix ridding, roof flashings etc. using a 25mm Aluminium embossed washer and appropriate screw.

Oversize holes should be 3mm greater diameter than the screw or as per the Primary Fixing Chart for stainless steel screws.

For further information on the fixing of Corrugated refer to E2/AS1 of the NZ Building Code and NZ Metal Roof and Wall Cladding Code of Practice, www.metalroofing.org.nz

These publications along with the foregoing technical data should form the basis of the design and installation of metal roofing and cladding

Also refer to our suite of detail drawings, and to NZ Steel Ltd and Pacific Coilcoaters literature.

ROOF EXPANSION PROVISIONS

Fix with recommended fasteners and systems from the Primary Fixing Chart and additionally allow for the following where applicable.

Aluminium				
Sheet Lengths	Up to 10 metres	10-12 metres	12-15 metres	>15 metres
Plain Aluminium & lighter colours in Favourable Installations (Refer NZMRM C.O.P. Section 4.1.6)	Fix using oversize holes with screws and approved load spreading profile Ali washers, and 30mm EPDM washers			Not recommended
Dark Coloured Aluminium in Favourable Installations (Refer NZMRM C.O.P. Section 4.1.6)	Fix using oversize holes with screws and approved load spreading profile Ali washers, and 30mm EPDM washers		Not recommended	
Plain Aluminium & lighter colours in Unfavourable Installations (Refer NZMRM C.O.P. Section 4.1.6)	Fix using oversize holes with screws and approved load spreading profile Ali washers, and 30mm EPDM washers		Not recommended	
Dark Coloured Aluminium in Unfavourable Installations (Refer NZMRM C.O.P. Section 4.1.6)	Fix using oversize holes with screws and approved load spreading profile Ali washers, and 30mm EPDM washers.	Not recommended		

For sheet lengths in excess of the above a step joint or other special provision for expansion is required. Refer to Roofing Industries.

When using load spreading profile washers for roofing fix ridding, roof flashings etc. using a 25mm Aluminium embossed washer and appropriate screw.

Oversize holes should be 3mm greater diameter than the screw or as per the Primary Fixing Chart for stainless steel screws.

For further information on the fixing of Corrugated refer to E2/AS1 of the NZ Building Code and NZ Metal Roof and Wall Cladding Code of Practice, www.metalroofing.org.nz

These publications along with the foregoing technical data should form the basis of the design and installation of metal roofing and cladding



Also refer to our suite of detail drawings, and to NZ Steel Ltd and Pacific Coilcoaters literature.

Box Gutter 125mm

0800 ROOFNZ (0800 766369)
Issue Date August 2008


Metalcraft's traditional 125mm Box Gutter is another popular rainwater system solution that is predominantly used in residential applications. With clean, bold lines and a high face Box Gutter 125mm conceals the sheet ends at the eave line and looks great with profiled Longrun sheeting or Tile roofing. Internal and external brackets are available in this profile and is suitable for use with Metalline Fascia. Box Gutter 125mm is available in Zinalume, Galvsteel, Colorsteel Endura and Colorsteel Maxx.

Cross-sectional Area: 8435mm²

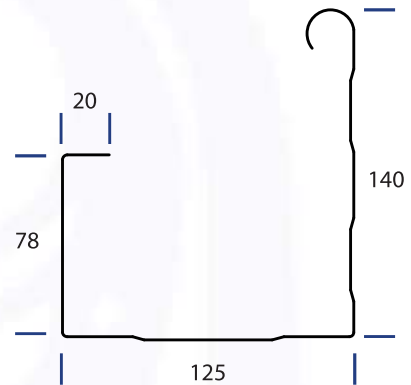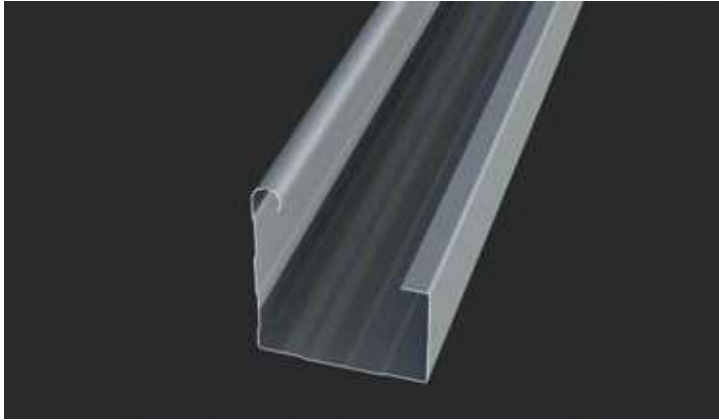

all dimensions are nominal

Catchment Area of Roof v Cross Sectional Area of Gutter

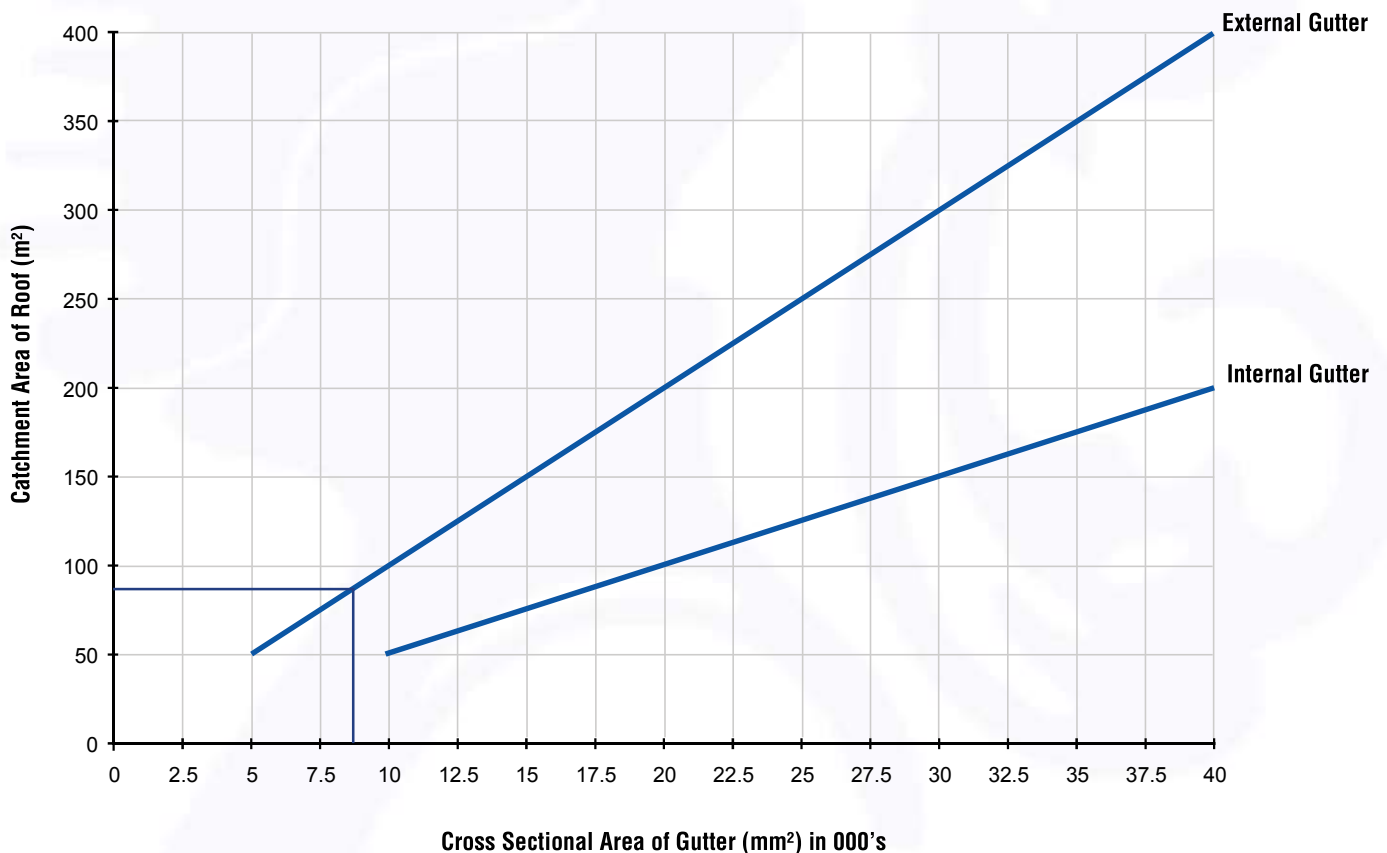

Note: The graph is based on a rainfall intensity of 100mm / hour and roof pitches less than 10 degrees.
For more information on roof catchment areas and the effect of gutter cross sectional areas download the document on Roof Drainage

Manufacturing Locations Auckland, Palmerston North

For other Metalcraft locations Box Gutter 125mm can be manufactured as a flashing

Box Gutter 125mm is available for purchase from all Metalcraft branch locations

www.metalcraftroofing.co.nz