

42 Orion Street Lot 37 DPS 16972 Section

ROTORUA CITY COUNCIL



BC

Plumbing & Drainage to New Dwelling

Owner: **G. Harker**

Valuation No.: **656/522pt**

Plumber: **W.A. Cobb**

Permit No.: **4154**

Drainlayer: **W.A. Cobb**

Appn No.: **1896**

INSPECTIONS

26-2-74

10-Date 74 **Plumbing Inspection Drainage Tested** **Final plumbing inspection**





1896

CITY OF ROTORUA

Valuation No. 656/522127

APPLICATION FOR PERMIT TO CARRY OUT SANITARY PLUMBING AND DRAINAGE WORK
I, the undersigned, hereby apply for permission to have the work described herein and set out on the plans attached hereto, carried out in accordance with the provisions of the Drainage and Plumbing Regulations 1959 at premises situated at:

Address Orion St.

Legal Description:

Lot No. 37 Deposited Plan No. 16972

Section No. _____ Block No. _____

Description of Work: Plumbing - Drainage on new house.

Name and address of Person for whom work is to be carried out:

I. Hooker.

Name and Address of Registered Plumber: W. G. Hall

31 Peggy Drive Petone.

Name and Address of Registered Drainlayer: W. G. Hall

31 Peggy Drive Petone.

PLUMBING 900-00
DRAINAGE 250-00

Signature: W. G. Hall

Date: 25/2/74

Value of Work Including Materials		
Plumbing:	\$ <u>900.00</u>	<u>12.00</u>
Drainage:	\$ <u>250.00</u>	<u>6.00</u>
Total	\$	<u>818.00</u>
Fee Enclosed	\$	_____

See Reverse for Fees and Notes.

FOR OFFICE USE ONLY

Date Received _____

Fee Paid \$18-00 12245

Date Paid 26-2-74

Issue Approved R. G. G.

Date Approved 15.2.74.

Permit No. 4154

Date Issued 15/2/74.

FOR OFFICE USE ONLY

PERMIT FEES

Value of work (Including value of fittings)

Dollars

up to 100
101 - 200
201 - 400
401 - 600
601 - 800
801 - 1000
1001 - 1200
1201 - 1400
1401 - 1600
1601 - 1800
1801 - 2000

Dollars

1:50
3
6
8
10
12
14
16
18
20
22

2001 & over, 1 dollar extra for every \$200 or part thereof in excess of 2000 dollars

NOTES:

Inspection & Testing Requirements:

Drainage Work: Drainlayers must notify the Plumbing and Drainage Inspector when all work is completed. This includes effluent disposal systems for septic tanks. All drains will be tested with a 5ft head of water. To implement this test it will be necessary for persons undertaking drainage work to have sufficient drain plugs to fill all sections of the drain prior to the Plumbing and Drainage Inspector arriving on the job, also to have made up a stand pipe to apply the 5ft head pressure.

This form of testing is essential to exclude the possibility of ground water infiltration with its attendant increase in pumping charges and overloading of the sewers and treatment plant.

Plumbing Work: Plumbers must notify the Drainage and Plumbing Inspector when work is ready for inspection as follows:

- (a) When the building has been initially piped out and wastes are installed (before wall linings are fixed and floors laid).
- (b) When work is complete.

Plans of Drainage and Plumbing work:

In the case of single houses a preliminary drainage plan will not be required. In all other cases however, plans of the preliminary proposal must be submitted at the time of application for a permit. In all instances however, an "as laid" plan must be available on site at the time of inspection. Failure to have such a plan ready will result in a refusal to undertake a test of the work.

In commercial buildings full plans and elevations of plumbing stacks must be provided at the time of application for a permit.

Plans MUST show figured dimensions
and distances from section boundaries


Rotorua City Council

DRAINAGE PLAN

SCALE: IN. TO A FOOT

NEW SEWERAGE DRAINS—RED
STORMWATER—DOTTED BLACK
OLD DRAINS—FULL BLACK

656/522 pt

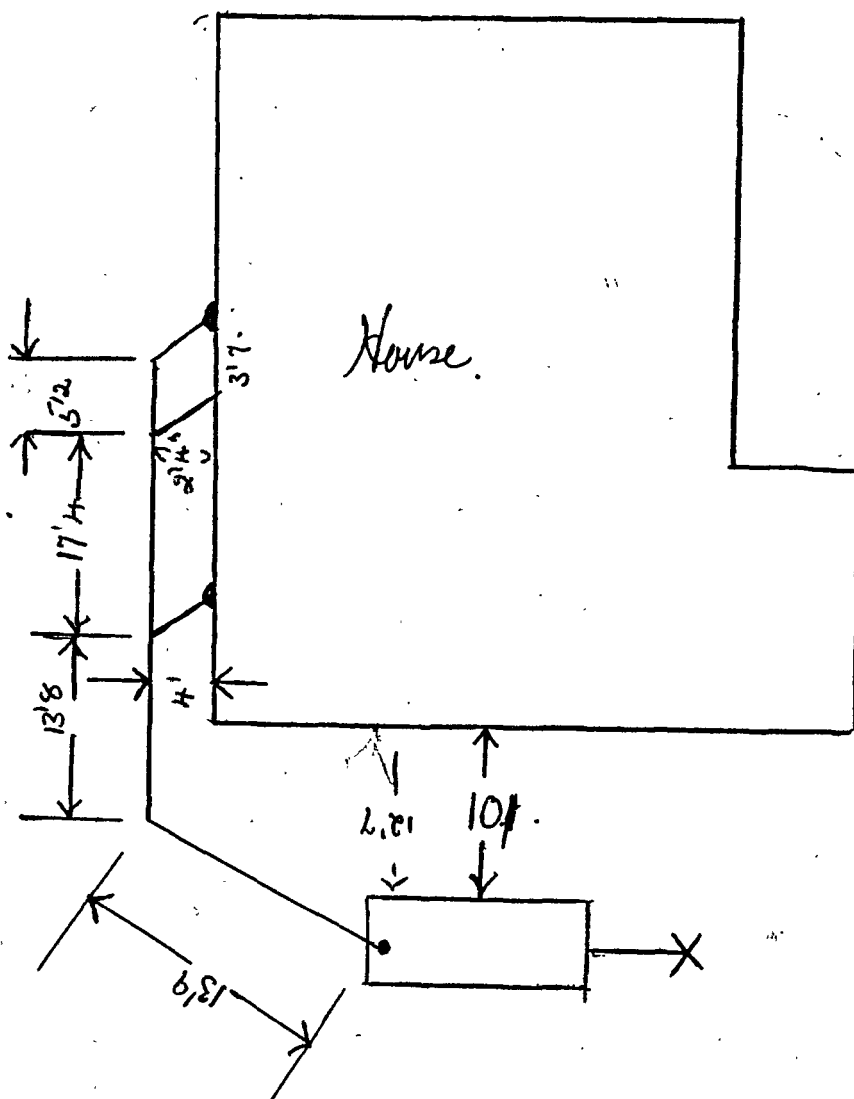

OWNER S Harker LOT 37 SEC. _____ BL. _____

No. _____ STREET Orion St. SIGNATURE _____

OF DRAINLAYER _____ DATE 10th June 74